


tend REVOLVING/FLASHING WARNING LIGHT

TWR/F/K

FEATURES

- Revolving or flashing types colors: RED, ORANGE, GREEN, BLUE and PINK.
- Revolving speed: 160RPM flashing frequency: 150 times per minute.
- Intermittent buzz, synchronizing frequency with flash approx 150 times per minute volume: 80 db or more.

MODEL DESIGNATION




Designation	Signal	Description
1.Type	TWR TWK TWS TWF TWL TRM	Rotary(Transparent Lens) Rotary(Diamond Lens) Rotary(Straight Lens) Flashing(LED) Rotary(LED) Rotary
2.Bzzer	Space B W S	Screw Terminal(Without Buzzer) Screw Terminal(With Buzzer) Lead(Without Buzzer) Lead(With Buzzer)
3.Size	08 10 12 16 18	Ø80mm Ø100mm Ø120mm Ø160mm Ø180mm

Designation	Signal	Description
4.Bulb	Space L	Incandescent Bulb LED
5.Voltage	1 2 7 9	110VAC 220VAC 24VAC/DC 12VAC/DC
6.Color of lens	R O G BL P	Red Orange Green Blue Pink

- Note: 1. TWR/TWK/TWS: Incandescent bulb only.
 2. TWF16/TWF18/TWL: LED only.
 3. LED colors are same as lens.
 4. TWK Ø100mm only.
 5. TRM: Incandescent bulb only. (No buzzer and Ø100mm only).
 6. TRM type: $\boxed{\text{TRM}} - \boxed{220} \boxed{\text{R}}$
(SOURCE) (COLOR)


RATING CURRENT(for reference only) WIRING DIAGRAM

Type	Current	Consumed power
TWFW-10L1R	34mA	3.8W
TWFW-10L2R	15mA	3.3W
TWLW-10L1R	17mA	1.9W
TWLW-10L2O	10mA	2.2W
TWFW-08L7R	AC73mA/DC30mA	AC1.8W/DC0.8W
TWLW-08L7R	AC86mA/DC77mA	AC2.1W/DC1.9W




DIMENSIONS AND MOUNTING HOLE


TWRW-08

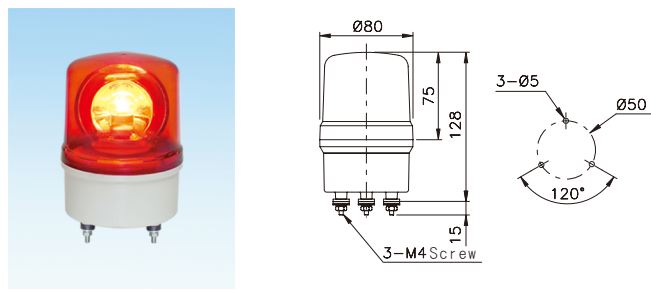


TWRW-10

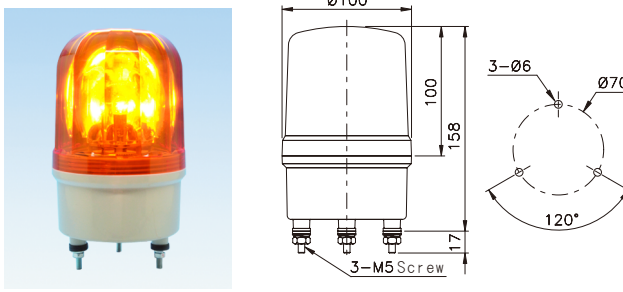


TWRW-12

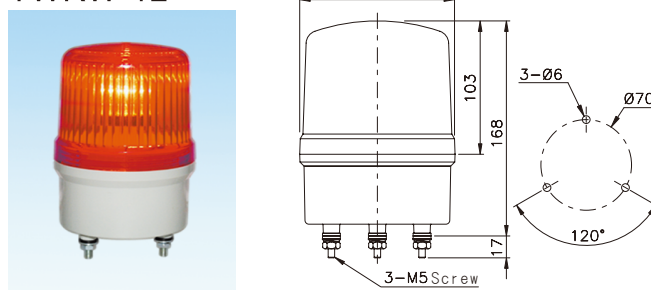


TWRW-16

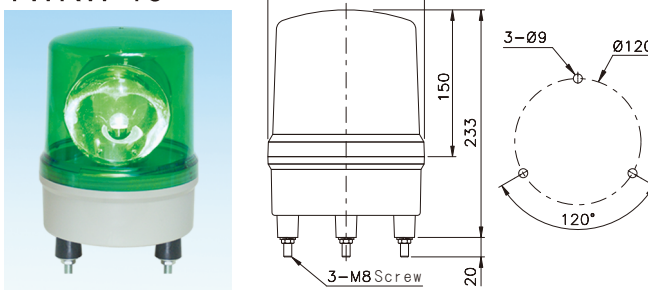

TWRW-18

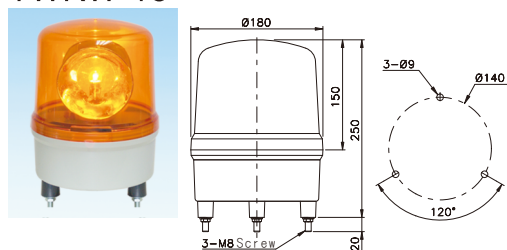

TRM

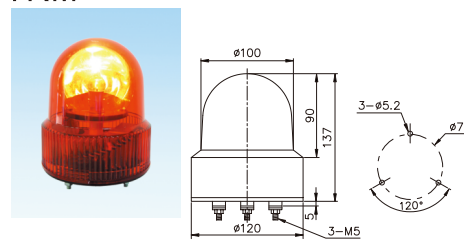

TWR10H

